TERMOSTATICI - THERMOSTATIC MIXERS

INOX

100.071.38.12T.12M.7CX.BOX.500 + Kit P. 823-IX

100.071.38.12T.12M.7CX.BOX.500

Incasso doccia termostatico con collettore 2 uscite. Senza doccetta e flessibile

Thermostatic built-in mixer with flow through valve 2 outlets. Without hand shower and flex hose

Kit P. 823-IX

Doccetta e flessibile

Hand shower and flex hose

OPERATING SPECIFICATIONS

Hot water supply temperature:
Maximum: 85°C - Advisable: 65°C
Minimum: 5°C
Operating Pressure
Maximum: 5 Bar
Minimum: 0.1 Bar
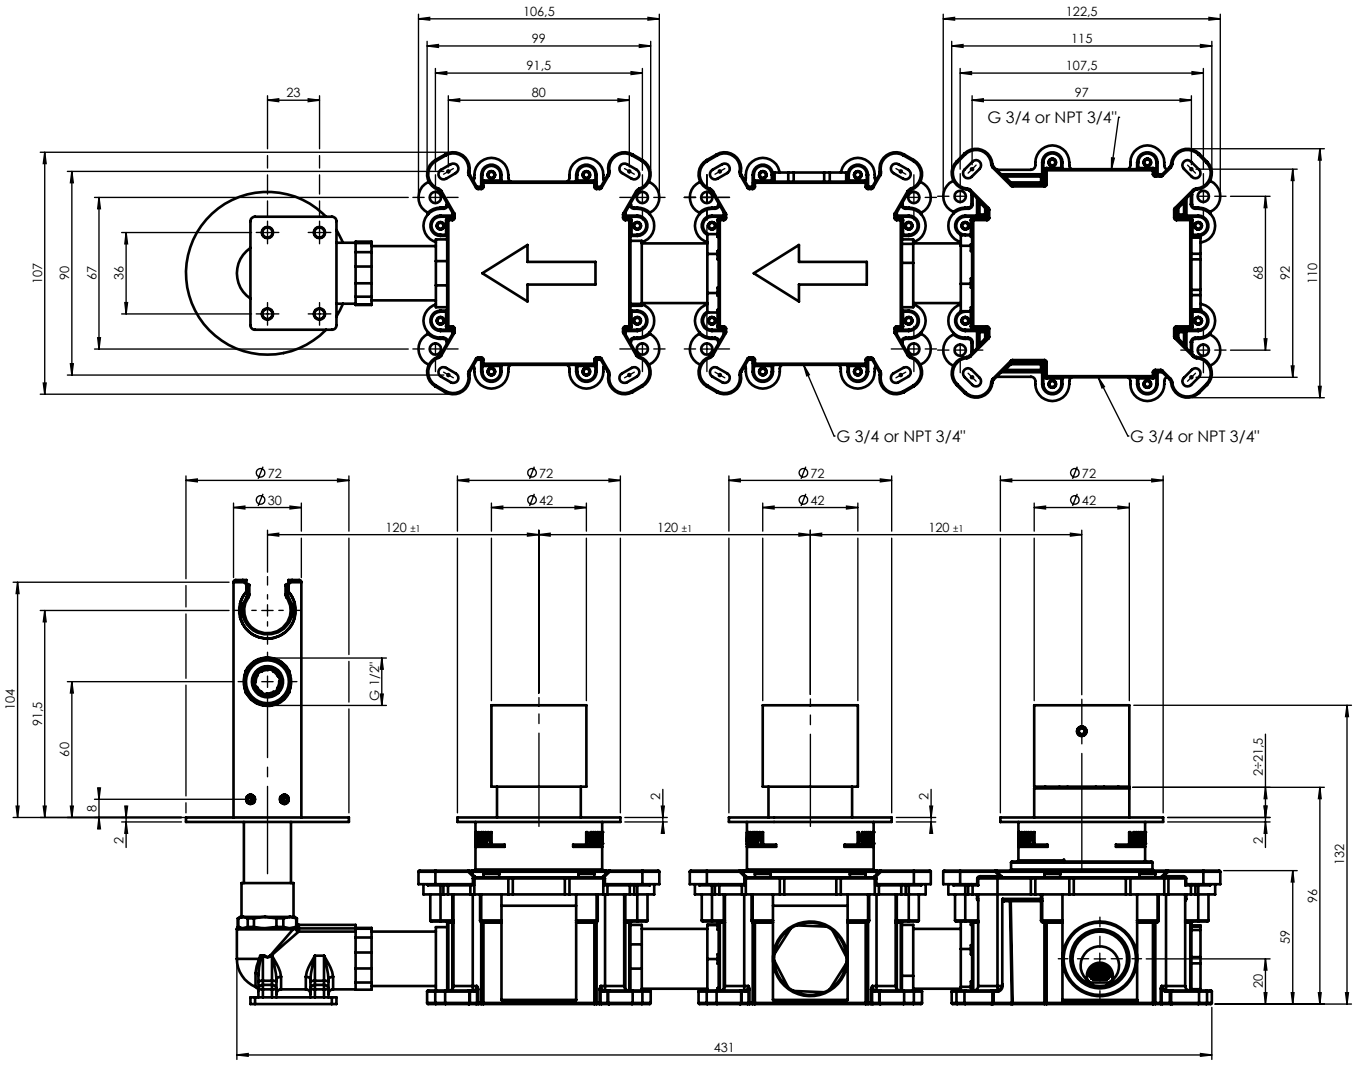
Disegno Tecnico - Technical Drawing