


TERMOSTATICI - THERMOSTATIC MIXERS

SIXTY

0G8.071.01.1QT.10Q.00R.600.3 + Kit P.728

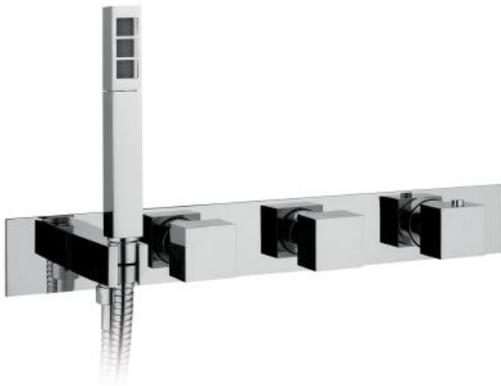

0G8.071.01.1QT.10Q.00R.600.3

Incasso doccia termostatico con collettore 2 uscite. **Senza doccetta e flessibile**

Thermostatic built-in mixer with flow through valve 2 outlets. **Without hand shower and flex hose**

Kit P.728

Doccetta e flessibile

Hand shower and flex hose

FINITURE - FINISHES



OPERATING SPECIFICATIONS

Hot water supply temperature:
 Maximum: 85°C - Advisable: 65°C
 Minimum: 5°C
 Operating Pressure
 Maximum: 5 Bar
 Minimum: 0.1 Bar



Disegno Tecnico - Technical Drawing

